





CL SER.9- 2454

RC QUADRA TURBO-R V-TECH

INSTRUCTION SHEET

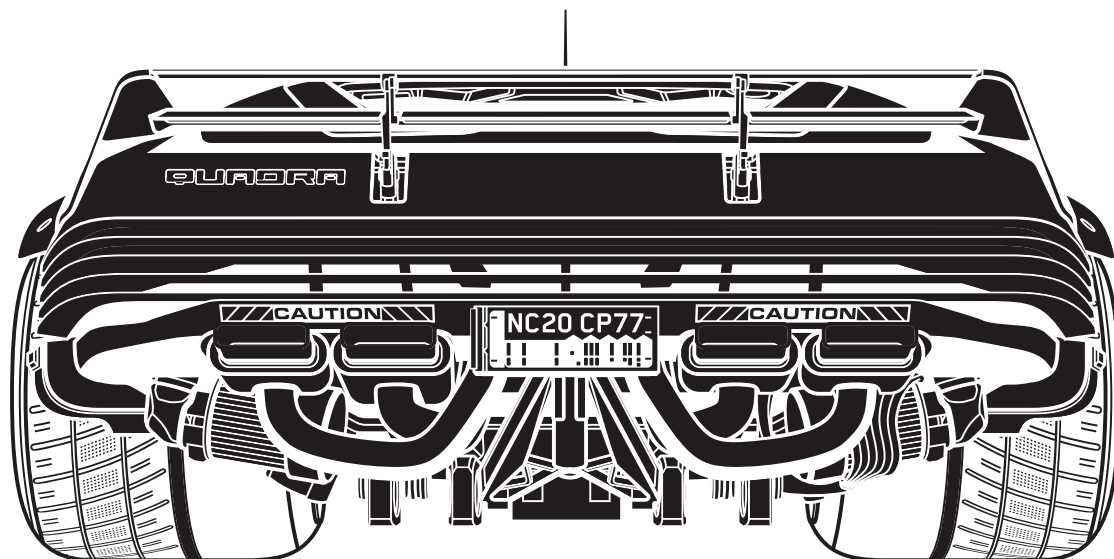

Included in the package

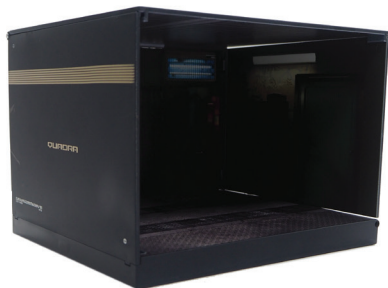


Garage x 1



Remote Car x 1



Controller x 1



USB Type C x 1



Instruction Sheet x 1

Remarks:

1. If the following information is updated, there will be no notification, please check whether the data in hand is the latest version before use.
2. We will not be responsible for the consequences caused by mistakes or improper operations.

Table of Contents

1. Product description	5
2. Function description	5
3. Controller operation	5
4. Vibration function	9
5. Charging	9
6. Low power alarm	9
7. Shut down	9
8. Turbo function settings	9
9. About the upgrade	9
10. The controller displays the name	9
11. Reset function	9
12. Receiving distance	9
13. Reference current	9
14. Controller electrical specifications	9
15. Charging garage	9
16. Note charging garage electrical specifications	11
17. Controller charging	11
18. Swing control car charging	11
19. References swing control car electrical specifications	12
20. Electronic performance standards	12

Please read the instructions carefully before using the product and keep it safe.

Safety Instructions

- The remote control car/controller contains a lithium battery. Do not disassemble, strike, crush, or throw it into fire. If severe swelling occurs, stop using immediately. Do not expose to high temperature environments.
- Due to the special nature of lithium batteries, extreme high or low ambient temperatures will affect storage performance and battery life. Therefore, do not use or store this product in environments with high temperature, low temperature, high humidity, or direct sunlight.
- Regularly check the charging cable, plug, casing, and other components for damage. If any damage is found, stop using until fully repaired.
- Moving parts carry certain risks. Do not place fingers, hair, clothing, or other objects into the gaps between the tires and the body to avoid being caught by rotating parts.
- Strictly follow the usage scenarios below:
 - Do not operate in areas with moving vehicles or near young children to avoid collisions or other dangers.
 - Do not drive on sand, waterlogged surfaces, or dusty areas to prevent malfunctions.
 - Do not drive toward people or animals to avoid accidents.
- For functional reasons, this product contains sharp components. Operate according to correct procedures and methods, paying special attention to eye protection.
- Do not bend, throw, or use this product in other rough ways to avoid accidents.
- Do not place this product into water sources or fire sources (such as stoves or gas burners) to prevent accidents.

1. Product description

The controller supports Switch, Android, Windows (PC), via Bluetooth; It is achieved by combining buttons between each platform.

2. Function description

SWITCH Function: Connect the controller to the Nintendo Switch console to operate compatible Switch games. Supports motor vibration feedback for an enhanced gaming experience.

Android Function: Connect the controller to an Android phone, tablet, or Android TV to play Android games with controller support. Compatible with Grape Game Hall, Octopus Game Hall, Left Game Hall, and New Game Hall.

Remote Control Car Function: Switch to remote control car mode using the designated key combination on the controller to operate the paired remote control car.


3. Controller operation

3.1 SWITCH MODE

"Press Y + HOME to power on and enter SWITCH pairing mode, LED1-LED4 indicators will flash in sequence.




Pairing on Switch (Bluetooth Connection): Enter the pairing interface on the Nintendo Switch console. The console will automatically initiate pairing. Once pairing is successful, the system will assign channels, and the corresponding channel indicator will remain solid.

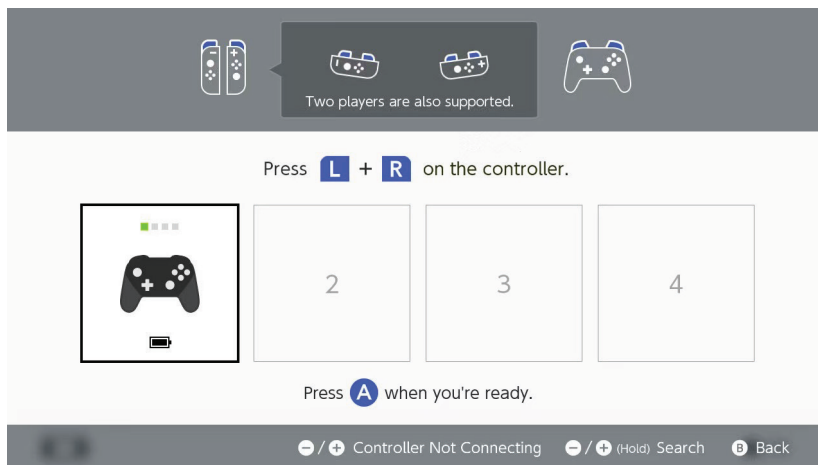

Place the Nintendo Switch into its dock, then connect the controller using the data cable. The controller will automatically connect to the Switch. After unplugging the cable, the controller will automatically reconnect to the Switch console via Bluetooth.

3.2 Android mode

Press B+HOME to boot into Android pairing mode.

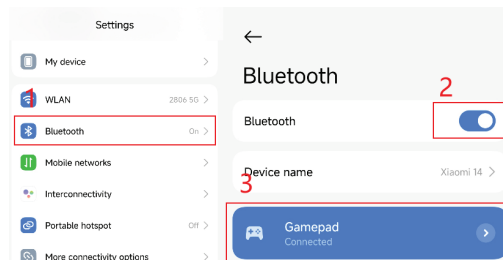

LED1-LED4 indicator flashes in a loop, turn on Bluetooth on your Android device, find "Gamepad" and tap to pair,

Pairing is successful, LED1 is solid, mouse function is supported, press L3+R3 to turn on mouse function; (Bluetooth connection)



3.3 When a Windows computer has Bluetooth function:

1. Press R1+HOME to power on the controller to enter Bluetooth pairing, and the LED1-LED4 indicator light will flash in a cycle.



2. Turn on the Bluetooth function on the computer, find "Xbox Wireless Controller" and click to pair, the pairing is successful, LED4 is solid, supporting HID devices; (Bluetooth connection)..

Bluetooth & other devices

+ Add Bluetooth or other device 2

Bluetooth On 1

Now discoverable as "WIN-916REA7E0KV"

Mouse, keyboard, & pen

Inphic PG9 Gaming Mouse

SKIN-2.4G keyboard

Bluetooth & other devices

+ Add Bluetooth or other device

Bluetooth On

Add a device

Add Device

Make sure your device is turned on and discoverable. Select the device you want to connect to below.

Xbox Wireless Controller Input 3



3.4 Remote Control Car Mode

Press A+HOME to turn on and enter remote control car mode. LED2 is always on



To control the front and rear with the left stick, and the left and right with the right stick (or directly control with the arrow keys)



4. Vibration function

This controller is equipped with motors. In Switch mode, vibration intensity can be adjusted using a key combination: while holding down the Screenshot button, press - or + to increase or decrease the vibration level.

5. Charging

When the controller is powered off and connected to the adapter, LEDs 1-4 will flash. Once fully charged, all four LEDs will turn off.

When connected via USB, the corresponding channel indicator will flash slowly depending on the platform. The light will remain solid once charging is complete.

6. Low power alarm

When the battery voltage of the controller is lower than 3.6V, the low power alarm (according to the principle of battery characteristics), the corresponding light flashes slowly, indicating that the controller is low on battery and needs to be charged; Controller will be off in low power when the controller battery voltage is below 3.45V

7. Shut down

When the controller is powered on, press and hold the HOME button to press and hold the 5S controller to power off.

When the controller is in the reconnected state, it will automatically shut down when it cannot be connected after 30 seconds.

When the controller is in the coding state, it will enter the reconnection when it cannot be matched after 60 seconds, and it will automatically shut down when the controller is connected and there is no key operation within 5 minutes.

8. TURBO function settings

The controller has a TURBO function, and you can set the TURBO by holding down the TURBO key and then pressing the corresponding button.

In SWITCH mode, can be set A, B, X, Y, L1, R1, L2, R2

In Windows mode, can be set A, B, X, Y, L1, R1, L2, R2

In Android mode, cab be set A, B, X, Y, L1, R1, L2, R2

9. About the upgrade

The controller can be upgraded driver (PC upgrade) via USB cable in platform WinXP/Win7/Win8. 1/Win10.

10. The controller displays name

SWITCH: Pro Controller

1. Reset function

When the controller is abnormal, it can be reset by pressing the reset button behind the controller

12. Receiving distance

The receiving distance of the controller should reach more than 8M

13. Reference current

<u>Current</u>	<u>Value</u>
Dormant current	0
Pair current	Less than 30MA
Operating current	Less than 30MA


14. Controller electrical specifications

Power supply method: Built-in lithium battery
 Battery capacity: 550MAH
 Charging method: USB, DC5V

Usage time: 20 hours
 Charging time: about 2 hours
 Charging current: less than 400MA

15. Charging Garage

Use the included Type C charging cable to plug into the garage charging port and.
 (As shown in the picture)



16. Refer to the charging garage electrical specifications

Current	Value
Dormant current	< 20mA
charging current	< 600MA

17. Controller charging

Use the Type-C charging cable to connect the Garage to the charger. Then, connect the controller to the Garage using the charging cable to begin charging as show in the picture below.

When the controller is powered off and connected with the charging cable, LEDs 1-4 will flash. Once fully charged, all four LEDs will turn off.


When the controller is connected via USB while in use, the corresponding channel indicator will flash slowly depending on the platform. The light will remain solid once charging is complete.

Or use the Type C charging cable to connect to the general charger for charging.
 (as shown in the picture).



18. Remote Car charging

Turn off the power of the remote car before charging. Use the provided Type C charging cable to connect the garage and charger. Place the car onto the platform of the garage for the wireless charging. During charging, the red light on the car body will remain on. When fully charged, the green light will turn on.

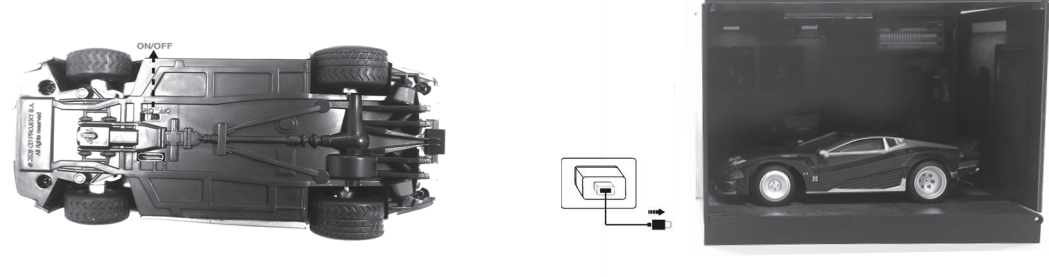

19. Refer to the current specification of the remote control car.

Current	Value
Dormant current	0
Pair current	Less than 30MA
Working current (motor)	500mA-1000mA

20. Remote control car electrical specification

Power supply method: Built-in lithium battery
Battery capacity: 100MAH
Charging method: USB, DC5V
Remote Control Distance: > 15 meters

Usage time: 0.3 hours
Charging time: about 1 hour
Charging current: less than 500MA

Supplier's Declaration of Conformity

47 CFR § 2.1077 Compliance Information

Unique identifiers

Trade name: Cyberpunk 2077 RC Quadra Turbo-R V-tech Remote Control car set

Model No.: 2058 Turbo-R -V

Responsible Party – U.S. Contact Information

Bolt Production & Logistics LLC

22365 El Toro Road, #2016, Lake Forest, California, ZIP Code 92630, United States

www.boltproduction.net

FCC Compliance Statement

This device complies with Part 15 of the FCC Rules. The operation is subject to

There are two conditions:

- (1) the device must not cause harmful interference and
- (2) This device must accept any interference received, including: may cause undesirable operation.

Note: This device has been tested and confirmed to meet the following limits.

Under Part 15 of the FCC Rules, Class B digital devices.

These limitations include: designed to provide reasonable protection against in Residential installation.

These devices generate, use, and transmit radios frequency energy, if not installed and used according to the instructions.

May cause harmful interference to radio communications. However, to ensure that no interference occurs during a particular installation. If so the device does cause harmful interference to radio or TV reception, this can be judged by switching and switching devices, encouraging users

Try to fix the disruption by one or more of the following:

- Reposition or reposition the receiving antenna.
- Increase the distance between the device and the receiver.
- Connect the device to the receiver is connected.
- Consult a dealer or experienced radio/TV technician for assistance.

